

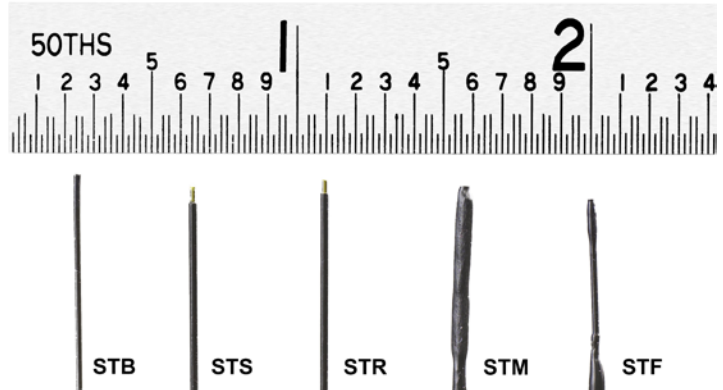
Immune, Accurate, and Safe Fiber Optic Probes and Accessories for use in Harsh Environments

Luxtron® Fiber Optic Thermometry Probes & Accessories

Leading the industry for more than 30 years, LumaSense Technologies' line of Luxtron fiber optic thermography probes are rugged and robust. Using Luxtron's patented technology, our Fluoroptic® probes are chemically resistant and immune to electrical noise. LumaSense offers probes for an array of applications and has extensive experience designing customized probes for OEM applications.

Benefits


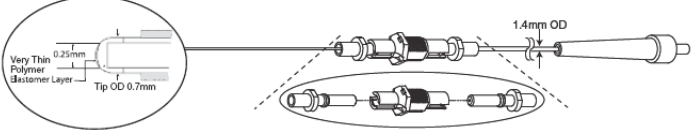
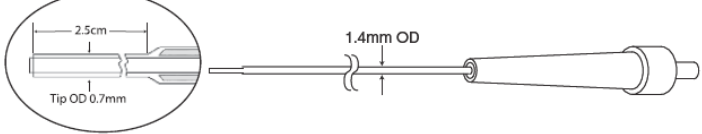
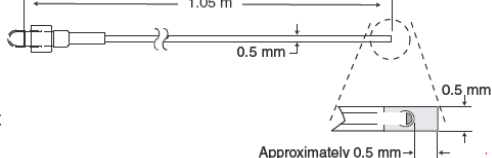




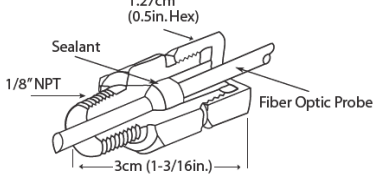
- Probes immune to a wide range of harsh environmental characteristics including but not limited to RF, MRI, Microwave, Induction Heating, High Voltage
- Chemically Resistant
- Non-Metallic
- Corrosion Resistant
- Safe for Flammable or Explosive Environments
- Stable and Inert Sensor



	Temp. Range (°C)	Response Time (Sec.)	Lengths Available	Example Applications
Fast Immersion (Air and Liquid): STF	0 to 295	0.25	1 m, 2 m, 5 m, or 10 m	- Monitoring of high voltage experiments - Temperature gradient mapping of fast temperature ramps - Temperature control of microwave processes
Surface Temperature: STS	-25 to 200	0.025	2 m or 5 m	- Heat monitoring of "live" electrical circuits - Temperature monitoring of implant leads at precise locations - Temperature monitoring of bonding surfaces
Remote Temperature: STR	-25 to 330	0.025	2 m or 5 m	- Testing of electro-explosive devices (EEDs) - Temperature monitoring of small targets
General Purpose: STB	0 to 120	0.25	1 m	- Temperature monitoring of clinical procedures and academic research
General Purpose: STM	-25 to 250	0.70	2 m or 5 m	- General purpose immersion and contact applications
MicroProbe	0 to 120	0.20	1 m	- Minimally invasive immersion or surface measurement - Medical research - Smallest diameter commercially available probe
DipTip Rugged Probes	-30 to 200	0.7	2 m, 4 m, 6 m, 8 m, or 10 m	- Monitoring Winding Hot Spot
Quality Probes				

Extensions

General Purpose: SST	-40 to 105		2 m, 5 m, or 10 m	- Standard jacketed extension cable for normal use
Heavy Duty: HST	-40 to 80		2 m, 5 m, or 10 m	- Heavy jacketed extension cable for rough environments
Medical: FOC-ST	0 to 80		2 m, 5 m, or 10 m	- Required extension cable for use with STB general probe
Single Fiber	-50 to 75		1 m to 50 m	- Used with DipTip Rugged and Quality Probes
Four Fiber				

STF Probe Application Temperature Range Response Time	Fast response immersion 0 to 295 °C 1.25 seconds still air; 250 milliseconds in stirred water	
STS Probe Kit Application Temperature Range Response Time Kit Includes	Surface contact -25 to 200 °C 25 milliseconds 2 m or 5 m probe and two 10 cm replaceable tips (tip OD 0.7 mm)	
STR Probe Kit Application Temperature Range Response Time Kit Includes	Non-contact remote sensing -25 to 330 °C 0.25 seconds Alpha phosphor material, three types of binders, 2 m blank probe, and Remote Sensing User Guide	
STB Probe¹ Temperature Range Length Response Time Fiber Type Connector Type	0 to 120 °C 1 meter 0.25 seconds 200 µm hard clad silica fiber with Tefzel® jacket RPC-1 molded plastic	
STM Probe Application Temperature Range Response Time	General purpose immersion and contact -25 to 250 °C 5 seconds still air; 0.7 seconds in stirred water	
MicroProbe Temperature Range Response Time Length	0 to 120 °C 200 ms in stirred water 1 meter	
DipTip Probe Application Temperature Range Response Time	Winding Hot Spot -30 to 200 °C 0.7 seconds in stirred water	
Quality Probe Application Temperature Range Response Time	Winding Hot Spot -30 to 200 °C 0.7 seconds in stirred water	
Compression Gland Feedthrough Material Compatible Probes Temperature Range Maximum Vacuum Maximum Pressure Sealing Gland	304 Stainless STM, STF, and STR -20 to 230 °C 5e10 ⁻⁶ Torr 3,000 psi Viton	

¹One FOC-ST extension required per probe

Note: Probes available in 2, 5, and 10 meter lengths unless otherwise specified.

LumaSense Technologies		Awakening Your 6th Sense	
Americas and Australia Sales & Service Santa Clara, CA Ph: +1 800 631 0176 Fax: +1 408 727 1677	Europe, Middle East, Africa Sales & Service Frankfurt, Germany Ph: +49 69 97373 0 Fax: +49 69 97373 167	India Sales & Support Center Mumbai, India Ph: +91 22 67419203 Fax: +91 22 67419201	China Sales & Support Center Shanghai, China Ph: +86 133 1182 7766 Ph: +86 21 5039 8096

info@lumasenseinc.com

LumaSense Technologies, Inc., reserves the right to change the information in this publication at any time.

www.lumasenseinc.com

©2016 LumaSense Technologies. All rights reserved.
 FOT Probes Datasheet Rev. 04/26/2016